



Al Andalus
Electrical solutions



Evora 2

ALUP-102

- APPLICATIONS


- Evora 2 LED Uplight uses COB LED and LED Driver for outdoor applications. such as:
- Landscape.
- Art and sculptures, or statues .
- Pathway and Walkway.
- Architectural Lighting.
- Outdoor Entertainment Areas.

- FEATURES

- Light Source: SMD LEDs.
- Stainless Steel Cover - Die-casting aluminium body - Frosted Glass Diffuser.
- Mounting Type: Floor Recessed Mounted.
- Finishing Color: Silver.
- LED Brand: Lumileds/Osram/Philips.

- DIMENSIONS

Model	ALUP102-12W	ALUP102-18W	ALUP102-30W
Ø	160 mm	160 mm	262 mm
H	102 mm	102 mm	118 mm

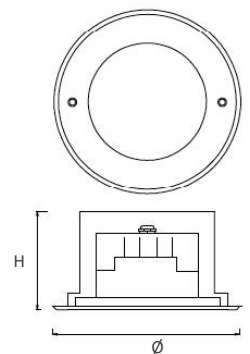



Al Andalus
Electrical solutions

Evora 2

ALUP-102

-TECHNICAL SPECIFICATIONS

Model	ALUP102-12W	ALUP102-18W	ALUP102-30W
Power	12W	18W	30W
Luminous Efficacy	70 lm/W		
Luminous flux	840 lm	1260 lm	2100 lm
CCT	3000 K		
Beam Angle	24°		
CRI (Ra)	>80		
IP	20		
LED Lifespan	> 50,000 hrs		

- LIGHT DISTRIBUTION DIAGRAM

