


MAGIC CUBE

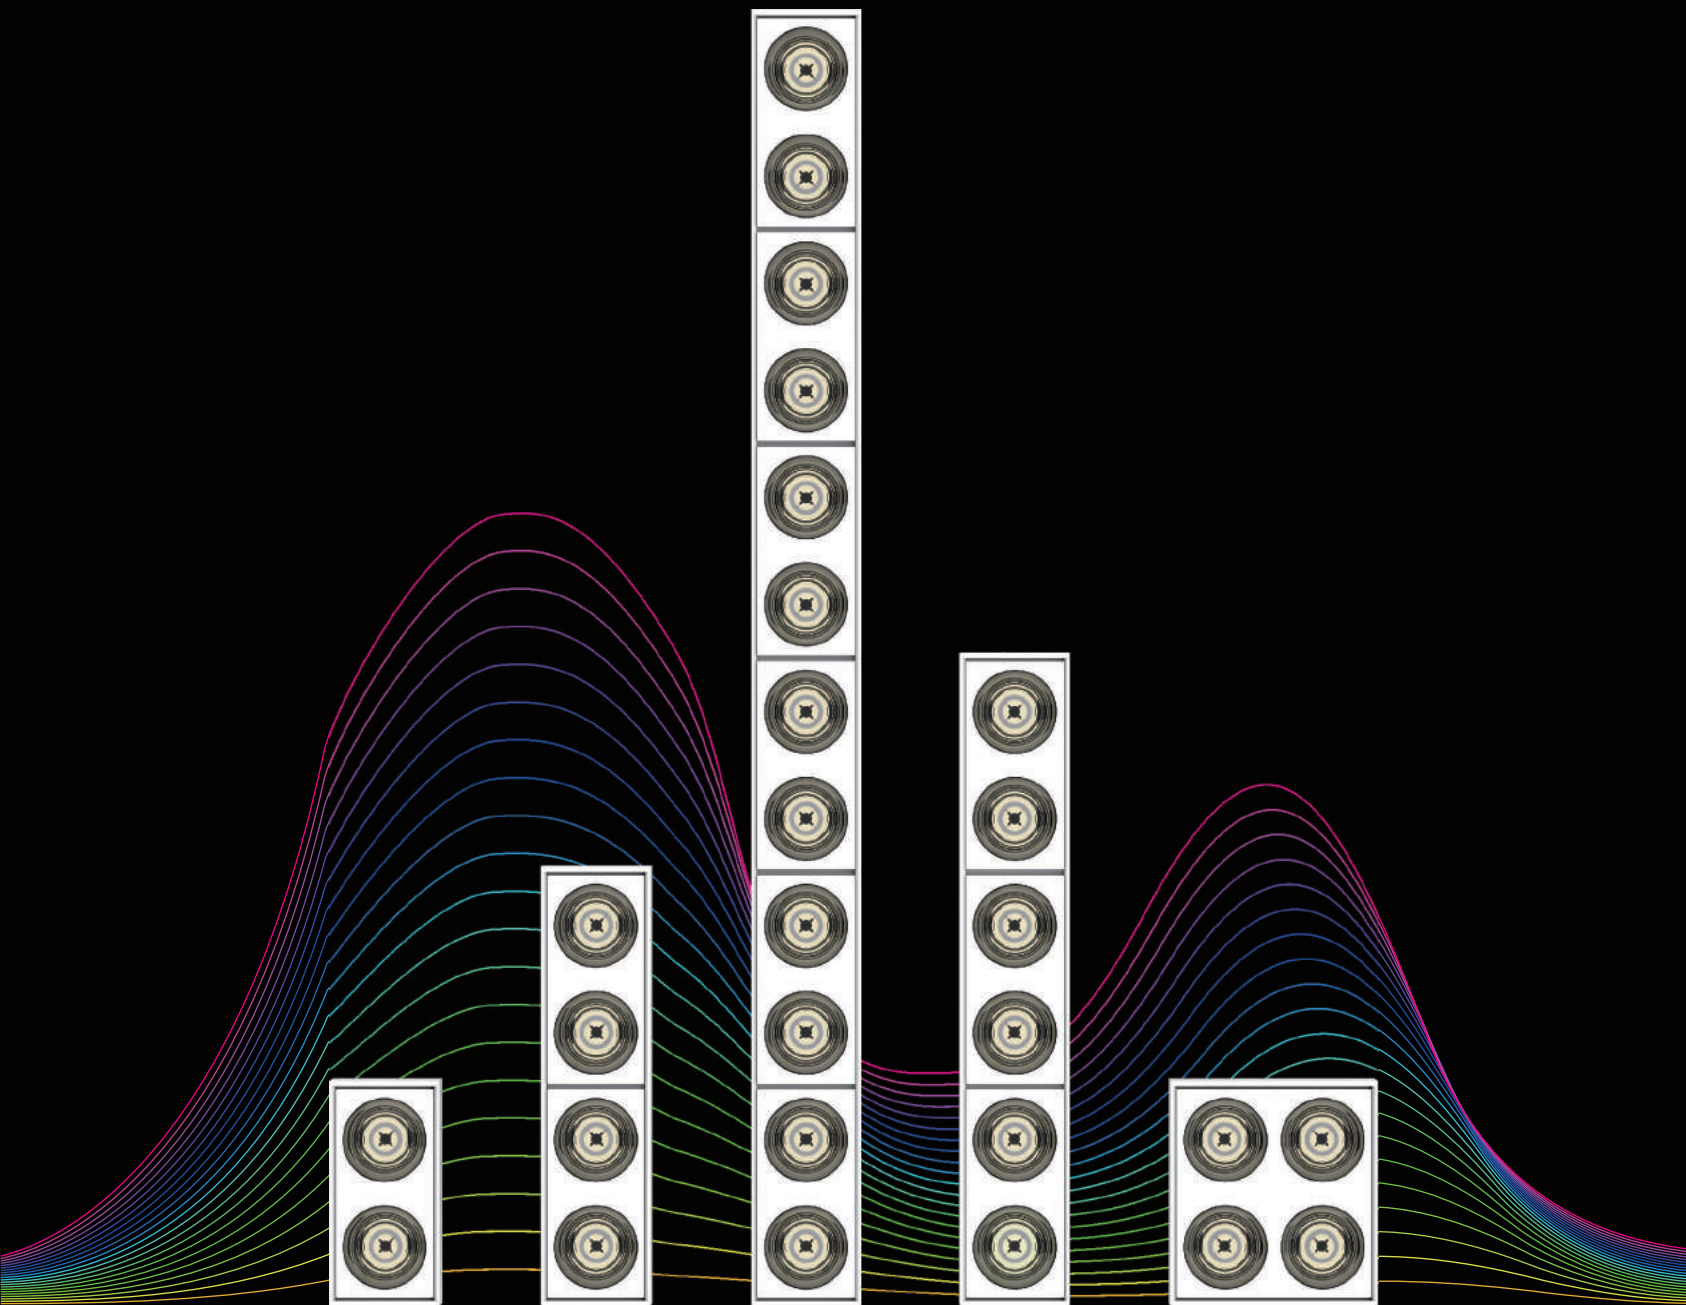

西铁·魔方 产品出光位置采用黑光技术, 每个发光位置采用独立的反光杯与透镜, 既而实现灯具的深度防眩, 做到UGR<15。灯具采用型材外壳, 实现产品尺寸不受外壳限制, 满足客户使用需求。产品具备类似魔方的多变性, 具备多种安装方式, 且做到出光位置一致性, 形成家族式产品, 令产品有较高的辨识度。

SEITY • MAGIC CUBE Using dark light technology with seperated reflector and lens to achieve deep anti-glare, UGR<15. The housing is made of extrusion aluminum to do different size with no limit, to meet customers demands. It has a variability like a magic cube with different installation methods, with consistency of the light output, a whole family series, to be unique and highly recognition

Black ● white ○ Silver ◉



602 001 **3W**



602 002 **4W**



602 004 **10W**



602 006 **12W**



602 012 **24W**



602 018 **36W**



602 002-1 **4W**



602 004-1 **10W**



602 006-1 **12W**



602 012-1 **24W**




602 018-1 **36W**



LIGHT SOURCE: PHILIPS LUMINUS DRIVER: PHILIPS SERY



SEITY LIGHTING H001-H002

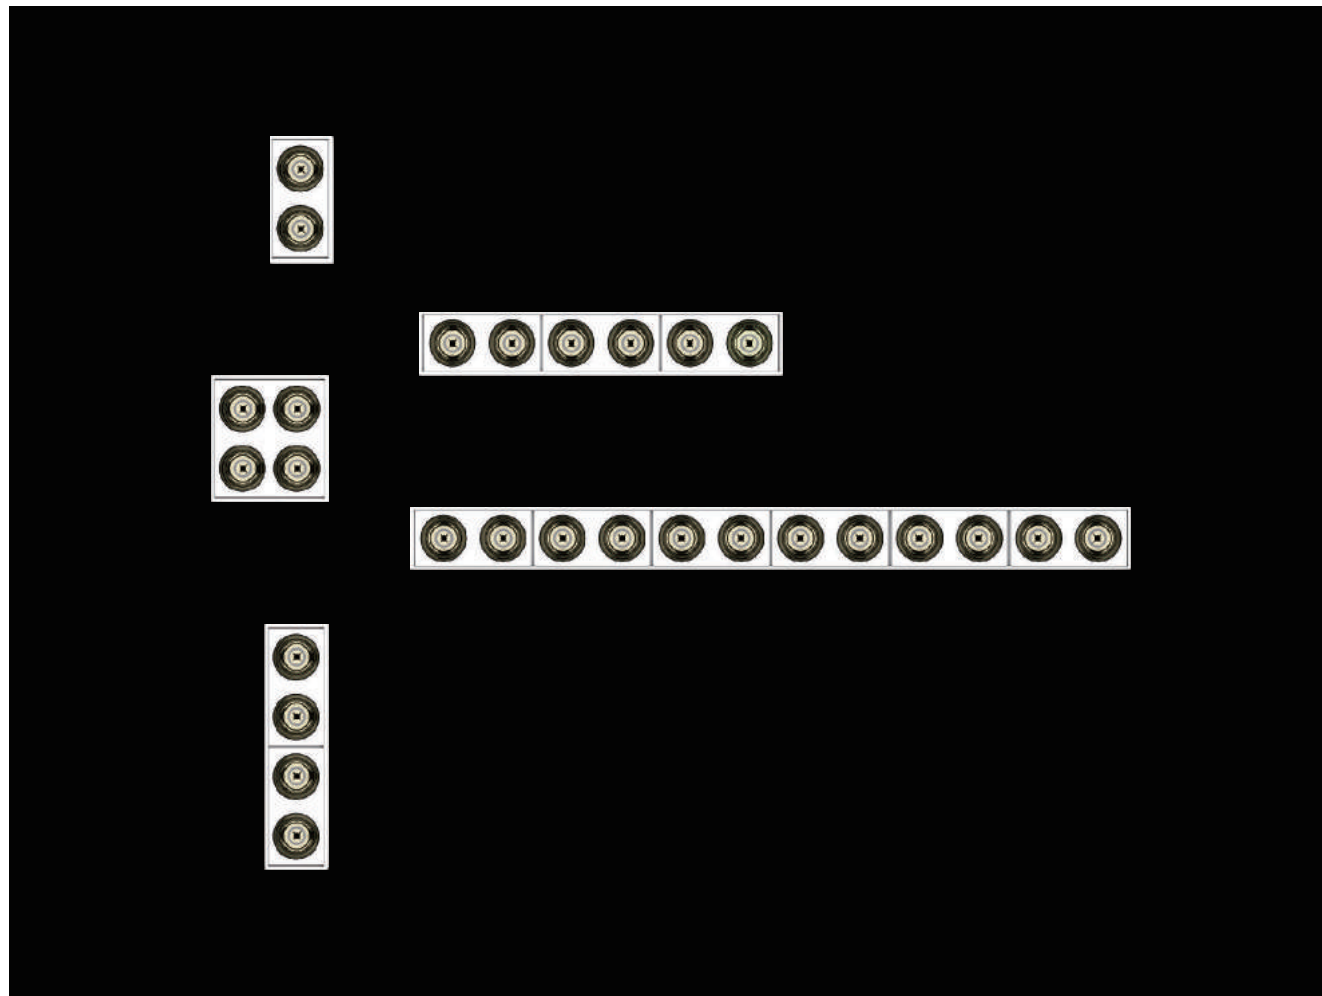

602 001

Technical Parameters

Light Source	Osram 3030 1-3W
Power	3W
CCT	2700K-6000K
CRI	>90
Input Voltage	AC 220-240V
Beam Angle	15°/25°/30°
Finishing color	Black
Cut size	Ø35 mm
Net Weight	0.69 kg/pc
QTY/CTN	24 PCS

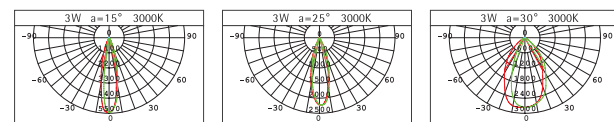



3W 15°				3W 25°				3W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	E _{max}	h(m)	d(m)	Em	E _{max}	h(m)	d(m)	Em	E _{max}
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7



602 002

Technical Parameters

Light Source	Osram 3030 1-3W
Power	4W
CCT	2700K-6000K
CRI	>90
Input Voltage	AC 220-240V
Beam Angle	15°/25°/30°
Finishing color	Black
Cut size	72*42 mm
Net Weight	0.69 kg/pc
QTY/CTN	24 PCS

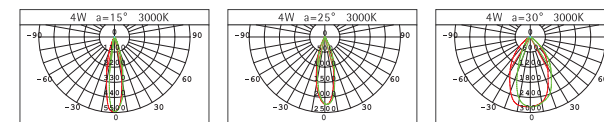



4W 15°				4W 25°				4W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	E _{max}	h(m)	d(m)	Em	E _{max}	h(m)	d(m)	Em	E _{max}
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7



602 004

Technical Parameters

Light Source	Osram 3030 1-3W
Power	10W
CCT	2700K-6000K
CRI	>90
Input Voltage	AC 220-240V
Beam Angle	15°/25°/30°
Finishing color	Black
Cut size	138*42 mm
Net Weight	0.69 kg/pc
QTY/CTN	24 PCS



10W 15°				10W 25°				10W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	E _{max}	h(m)	d(m)	Em	E _{max}	h(m)	d(m)	Em	E _{max}
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7









602 012

Technical Parameters

Light Source	Osram 3030 1-3W
Power	24W
CCT	2700K-6000K
CRI	>90
Input Voltage	AC 220-240V
Beam Angle	15°/25°/30°
Finishing color	Black
Cut size	404*42 mm
Net Weight	0.69 kg/pc
QTY/CTN	24 PCS







24W 15°				24W 25°				24W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	E _{max}	h(m)	d(m)	Em	E _{max}	h(m)	d(m)	Em	E _{max}
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7



602 006

Technical Parameters

Light Source	Osram 3030 1-3W
Power	12W
CCT	2700K-6000K
CRI	>90
Input Voltage	AC 220-240V
Beam Angle	15°/25°/30°
Finishing color	Black
Cut size	204*42 mm
Net Weight	0.69 kg/pc
QTY/CTN	24 PCS







12W 15°				12W 25°				12W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	E _{max}	h(m)	d(m)	Em	E _{max}	h(m)	d(m)	Em	E _{max}
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7



602 018

Technical Parameters

Light Source	Osram 3030 1-3W
Power	36W
CCT	2700K-6000K
CRI	>90
Input Voltage	AC 220-240V
Beam Angle	15°/25°/30°
Finishing color	Black
Cut size	604*42 mm
Net Weight	0.69 kg/pc
QTY/CTN	24 PCS



36W 15°				36W 25°				36W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	E _{max}	h(m)	d(m)	Em	E _{max}	h(m)	d(m)	Em	E _{max}
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7







LIGHT SOURCE: PHILIPS LUMINUS DRIVER: PHILIPS SERY



602 002-1

Technical Parameters

Light Source Osram 3030 1-3W
 Power 4W
 CCT 2700K-6000K
 CRI >90
 Input Voltage AC 220-240V
 Beam Angle 15°/25°/30°
 Finishing color Black
 Cut size 75*40 mm
 Net Weight 0.69 kg/pc
 QTY/CTN 24 PCS







4W 15°				4W 25°				4W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7



602 004-1

Technical Parameters

Light Source Osram 3030 1-3W
 Power 10W
 CCT 2700K-6000K
 CRI >90
 Input Voltage AC 220-240V
 Beam Angle 15°/25°/30°
 Finishing color Black
 Cut size 142*40 mm
 Net Weight 0.69 kg/pc
 QTY/CTN 24 PCS







10W 15°				10W 25°				10W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7



602 006-1

Technical Parameters

Light Source Osram 3030 1-3W
 Power 12W
 CCT 2700K-6000K
 CRI >90
 Input Voltage AC 220-240V
 Beam Angle 15°/25°/30°
 Finishing color Black
 Cut size 208*40 mm
 Net Weight 0.69 kg/pc
 QTY/CTN 24 PCS







12W 15°				12W 25°				12W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7



602 012-1

Technical Parameters

Light Source Osram 3030 1-3W
 Power 24W
 CCT 2700K-6000K
 CRI >90
 Input Voltage AC 220-240V
 Beam Angle 15°/25°/30°
 Finishing color Black
 Cut size 408*45 mm
 Net Weight 0.69 kg/pc
 QTY/CTN 24 PCS







24W 15°				24W 25°				24W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7



602 018-1

Technical Parameters

Light Source Osram 3030 1-3W
 Power 36W
 CCT 2700K-6000K
 CRI >90
 Input Voltage AC 220-240V
 Beam Angle 15°/25°/30°
 Finishing color Black
 Cut size 606*45 mm
 Net Weight 0.69 kg/pc
 QTY/CTN 24 PCS



36W 15°				36W 25°				36W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7



LIGHT SOURCE: PHILIPS LUMINUS DRIVER: PHILIPS SERY

MAGIC CUBE

Black ● white ○ Silver ○



602 004-2 10W



602 006-2 12W



602 012-2 24W



602 102 4W



602 104 10W



602 106 12W



602 104-2 10W



602 112 12W



602 318 18W



602 330 30W







602 336 36W



602 006-2

Technical Parameters

Light Source	Osram 3030 1-3W
Power	12W
CCT	2700K-6000K
CRI	>90
Input Voltage	AC 220-240V
Beam Angle	15°/25°/30°
Finishing color	Black
Cut size	220*64 mm
Net Weight	0.69 kg/pc
QTY/CTN	24 PCS







12W 15°				12W 25°				12W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7



602 004-2

Technical Parameters

Light Source	Osram 3030 1-3W
Power	10W
CCT	2700K-6000K
CRI	>90
Input Voltage	AC 220-240V
Beam Angle	15°/25°/30°
Finishing color	Black
Cut size	154*64 mm
Net Weight	0.69 kg/pc
QTY/CTN	24 PCS







10W 15°				10W 25°				10W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7



602 012-2

Technical Parameters

Light Source	Osram 3030 1-3W
Power	24W
CCT	2700K-6000K
CRI	>90
Input Voltage	AC 220-240V
Beam Angle	15°/25°/30°
Finishing color	Black
Cut size	418*64 mm
Net Weight	0.69 kg/pc
QTY/CTN	24 PCS



24W 15°				24W 25°				24W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7







LIGHT SOURCE: PHILIPS LUMINUS DRIVER: PHILIPS SERY



602 102

Technical Parameters

Light Source Osram 3030 1-3W
 Power 4W
 CCT 2700K-6000K
 CRI >90
 Input Voltage AC 220-240V
 Beam Angle 15°/25°/30°
 Finishing color Black
 Net Weight 0.69 kg/pc
 QTY/CTN 24 PCS







4W 15°				4W 25°				4W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7



602 104

Technical Parameters

Light Source Osram 3030 1-3W
 Power 10W
 CCT 2700K-6000K
 CRI >90
 Input Voltage AC 220-240V
 Beam Angle 15°/25°/30°
 Finishing color Black
 Net Weight 0.69 kg/pc
 QTY/CTN 24 PCS







10W 15°				10W 25°				10W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7



602 106

Technical Parameters

Light Source Osram 3030 1-3W
 Power 12W
 CCT 2700K-6000K
 CRI >90
 Input Voltage AC 220-240V
 Beam Angle 15°/25°/30°
 Finishing color Black
 Cut size 210*42 mm
 Net Weight 0.69 kg/pc
 QTY/CTN 24 PCS







12W 15°				12W 25°				12W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7



602 112

Technical Parameters

Light Source Osram 3030 1-3W
 Power 24W
 CCT 2700K-6000K
 CRI >90
 Input Voltage AC 220-240V
 Beam Angle 15°/25°/30°
 Finishing color Black
 Net Weight 0.69 kg/pc
 QTY/CTN 24 PCS







24W 15°				24W 25°				24W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7



602 104-1

Technical Parameters

Light Source Osram 3030 1-3W
 Power 10W
 CCT 2700K-6000K
 CRI >90
 Input Voltage AC 220-240V
 Beam Angle 15°/25°/30°
 Finishing color Black
 Net Weight 0.69 kg/pc
 QTY/CTN 24 PCS



10W 15°				10W 25°				10W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7




LIGHT SOURCE: PHILIPS LUMINUS DRIVER: PHILIPS SERY






chnical Parameters

Light Source	Osram 3030 1-3W
Power	30W
CCT	2700K-6000K
CRI	>90
Input Voltage	AC 220-240V
Beam Angle	15°/25°/30°
Finishing color	Black
Net Weight	0.69 kg/pc
QTY/CTN	24 PCS




602 330






30W 15°				30W 25°				30W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	E _{max}	h(m)	d(m)	Em	E _{max}	h(m)	d(m)	Em	E _{max}
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7

Technical Parameters

Light Source	Osram 3030 1-3W
Power	18W
CCT	2700K-6000K
CRI	>90
Input Voltage	AC 220-240V
Beam Angle	15°/25°/30°
Finishing color	Black
Net Weight	0.69 kg/pc
QTY/CTN	24 PCS




602 318






18W 15°				18W 25°				18W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	E _{max}	h(m)	d(m)	Em	E _{max}	h(m)	d(m)	Em	E _{max}
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7

Technical Parameters

Light Source	Osram 3030 1-3W
Power	36W
CCT	2700K-6000K
CRI	>90
Input Voltage	AC 220-240V
Beam Angle	15°/25°/30°
Finishing color	Black
Net Weight	0.69 kg/pc
QTY/CTN	24 PCS



602 336



36W 15°				36W 25°				36W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	E _{max}	h(m)	d(m)	Em	E _{max}	h(m)	d(m)	Em	E _{max}
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7



LIGHT SOURCE: PHILIPS LUMINUS DRIVER: PHILIPS SERY